

Control Transformers

Connect Range Data Sheet

Technical data

Control Transformer	Class 1 Isolation Transformer with Earth Screen between Primary and Secondary
Standard	IEC / BS-EN 61558
Primary Voltages	230V or 400V
Secondary Voltages	One of the following. 12V, 24V, 48V, 110V, 230V
Frequency	50/60Hz
Insulation Class	B
Insulation Resistance	> 5 Meg Ω
Dielectric Strength	Primary to Secondary. > 2.5kV Primary to Earth > 2.5kV Secondary to Earth > 2.5kV
Ambient Temperature	40° C
MTBF	200,000hrs

Transformer circuit protection

Transformers must be protected against short circuit and overload


Primary circuit. The primary side of the Transformer should be protected against short circuit thereby cutting the supply voltage in the event of a short circuit fault.

The rating of the primary protection device has to take into account the high inrush current during energizing of the Transformer.

The table below gives suggested protection values to avoid nuisance tripping on inrush

Rating VA	Primary Volts	Amps	Fuse	Type C MCB	Type D MCB	Primary Volts	Amps	Fuse	Type C MCB	Type D MCB
50	230	0.21	1	1	1	415	0.12	500mA	1	1
75	230	0.27	1	1	1	415	0.15	500mA	1	1
100	230	0.43	1	2	1	415	0.24	1	1	1
150	230	0.65	2	2	1	415	0.36	1	1	1
200	230	0.86	2	6	2	415	0.48	1	2	1
250	230	1.09	3.15	6	2	415	0.60	2	2	1
300	230	1.2	3.15	6	3	415	0.72	2	2	2
500	230	2.17	4	10	6	415	1.20	3.15	6	4
750	230	3.26	6	10	6	415	1.80	3.15	6	4
1000	230	4.34	8	10	6	415	2.40	5	6	4
1500	230	6.52	10	16	10	415	3.61	6	10	6
2000	230	8.69	12	16	10	415	4.82	10	10	6
2500	230	10.86	16	25	16	415	6.02	10	16	10

Secondary circuit. The secondary circuit should be protected against short circuit and overload. The value of the protection should be the same or less than the rated output current.

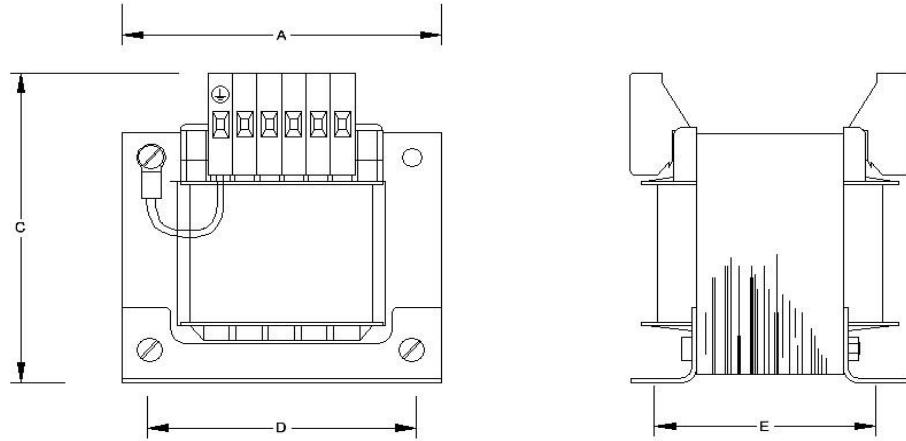

VA	A	B	C	D	E	Weight Kg	% Reg.	Watts Loss	Inrush VA For 10% Volt drop	Inrush VA For 5% Volt drop
25	66	68	77	50	44	0.7	11	6	48	36
50	76	70	86	56	47	1.1	9.8	9	105	77
75	76	76	86	56	53	1.5	8.9	11	135	102
100	84	78	95	64	63	2.1	8.4	14	250	175
150	96	76	102	84	65	2.25	6.7	18	375	260
200	96	86	102	84	72	2.8	5.8	21	550	375
250	96	101	102	84	90	3.7	5.6	27	720	470
300	120	88	122	90	73	4.4	5.3	31	870	585
400	120	100	122	90	85	5.3	5.0	30	1200	790
500	120	120	122	90	106	6.5	4.1	31	1700	1100
750	150	110	140	122	90	8.0	5.2	60	2200	1475
1000	150	161	140	122	106	10.0	3.3	67	4000	2500
1500	150	188	140	122	134	14.0	3.2	88	6200	3850
2000	192	150	165	153	125	20.5	3.3	100	8060	5030
2500	192	178	180	153	153	24.0	2.6	120	12100	7300

Power Rating Calculation

To choose the size of Transformer required for an application the total inrush VA must be calculated. This figure is then applied to the table above with the maximum allowable voltage drop taken into account.

eg. For a calculated inrush of 2100VA the appropriate Transformer is as follows

- 1) For 10% drop in output volts during inrush. Choose 750 VA
- 2) For 5% drop in output volts during inrush. Choose 1000 VA

Consideration must also be given to the continuous VA requirement.