

Data sheet

Commercial Art.No.: 81.000.6134.0

Switched-mode power supply WIPOS P1 48-5

wipos switched-mode power supply, nominal voltage: 48 V DC / 5A (setting range 47-56 V DC), sustained short-circuit protection, input voltage range: 115 V AC / 230 V AC, 210-370 V DC, single phase, W x H x D: 83 x 123,6 x 123,6 mm



Commercial Art.No.	81.000.6134.0
EAN	4049088106125
Order Unit	1

Technical data

General

Connection type	screw connection
Number of phases	Single phase power supply
Modular version	yes
Mounting type, other	No
Mounting type, wall mounting	No
Rail mounting possible	yes
Housing material	Metal
Operating temperature min.	-40 °C
Operating temperature max.	71 °C
relative humidity min.	20 %
relative humidity max.	95 %
Storage temperature / transport min.	85 °C
Storage temperature / transport max.	-40 °C
Degree of protection (IP)	IP20
Parallel-service possible	yes
Number of parallel switchable device	3

Technical data

Function display	"DC OK" (LED green) (U(o) 17.6...19.4V)
function display "DC Low"	"DC Low" (LED red)
Short-circuit protective device	Strombegrenzung (fold forward)
temperature coefficient	±0,03%/K
ripple and noise	< 0.1 V
hold time 115V AC	> 25 ms
hold time 230V AC	> 30 ms
isolating voltage Output DC	4242 V

cohesive resistance (In-/Output)	100 MOhm
Derating	61°C...71°C: 2,5 %/K
cooling	free convection
MTBF	423.000h
Connector cross section (input)	min. 0,5mm ² (AWG24) max. 6mm ² (AWG10)
Connector cross section (output)	min. 0,5mm ² (AWG24) max. 6mm ² (AWG10)
Wire strip length	8 mm
Permissible torque max.	0.6 Nm
CE-Norm	EN55022 & EN61000-6-3, EN61000-3-2, EN61000-3-3, EN55024 & EN61000-6-2, EN61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-5, EN61000-4-6, EN61000-4-8, EN61000-4-11, EN60204-1, EN61204-3
TÜV/safety	EN60950-1, EN61558-1, EN61558-2-16(erfüllt EN60204) , IRAM
Approval cULus	UL 508 Listed, UL60950-1 Recognized
Number of +	2
Number of -	2
Further terminals	L1, N, PE, NC (not used)

Output

Type of output voltage	DC
Power output	480 W
Output voltage stabilized	yes
Output voltage	48 V
Min. output voltage	47 V
Max. output voltage	56 V
Min. output voltage	47 V
Max. output voltage	56 V
Output current	5 A

Input

Type of voltage (input voltage)	
Primary voltage range	90 V
Min. input voltage	90 V
Max. input voltage	264 V
Rated frequency min.	47 Hz
Rated frequency max.	63 Hz
Input fuse	T6,3A / 250V (intern)

Dimensions

Depth	123.6 mm
Width	83 mm
Height	123.6 mm
Mounting Distance horizontal	25 mm
Mounting Distance vertical	25 mm
Weight	1.3 kg

Classification



ECLASS 11	
ECLASS 8.1	27049002
ETIM 7.0	EC002540
ETIM 6.0	EC002540
ETIM 5.0	EC002540

ETIM 3.0	EC001039
----------	----------

Product compliance

ROHS conformity status	Compliant
REACH-SVHC conformity status	Compliant

Qu - PEE 12/92

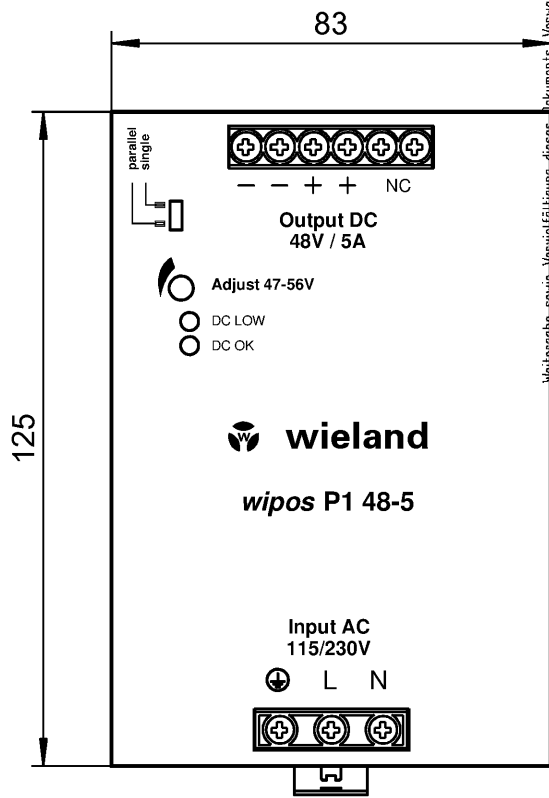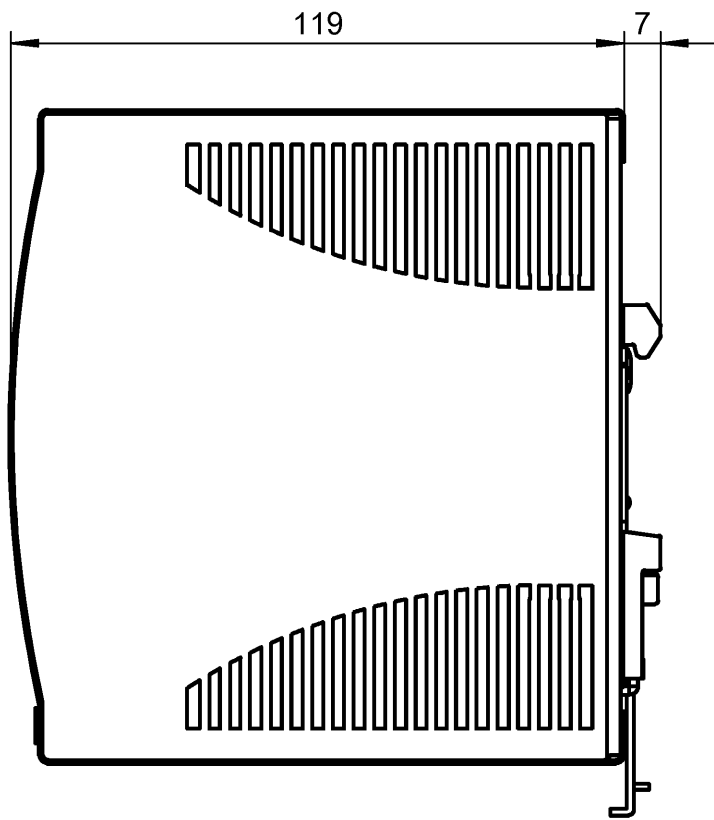

Verwendung und Mitteilung
soweit nicht ausdrücklich gestattet.
The reproduction, distribution and utilization of this document as well as the
communication of its contents to others without express authorization is prohibited.

Weitere Angaben siehe KATALOG oder eKatalog.
Additional data see CATALOG or eCatalog.

www.wieland-electric.com
eshop.wieland-electric.com

ja/yes Stoffverbots- und Deklarationsliste nach WN 5020.010 ist einzuhalten.
Conformity with Wieland document WN 5020.010 e (list of prohibited / declarable hazardous substances) to be declared!

Freitoleranz nach General tolerance		CAD-Zeichnung, keine manuellen Änderungen CAD-Drawing, no manual modifications allowed			1. Verwendung: First Use:		Blatt: Sheet:		
		Werkstoff/ Material		2016	Tag/ Date	Name	Zeichnung Nr./ Drawing No.		
				gezeichnet drawn	04.03.	Koetzner	81.000.6134.0 01K		
Maßstab/Scale				geprüft checked					
		Datei/ File: 033801__01K.DCD		Ersatz für/ Replacement for:					
		 www.wieland-electric.com		Type	Benennung/ Title		Teilespezifikation / Component specification		
Index				Datum/ Blatt Date/ Sheet				Schaltnetzteil / Switching Power Supply wipos P1 48 VDC / 5 A 1PH	
Änderung/ Revision									

A
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
M1
M2
M3
L
G
i
11.1
12.1
1.1