



easy Remote Touch Display, Operating panel, 24 V DC, 4.3z, TFTcolor, 480x272 px, Res., ethernet

Part no. **EASY-RTD-DC-43-03B1-00**  
 Catalog No. **199740**

## Delivery program

Product range			Visualisation solutions XV
Product range			easyE4 XV-102
Subrange			Touch HMI easy
Function			Touch display for easyE4
Function			as a remote touch display for the easyE4 control relay
Description			easyRemote touch display, control panel, 24 VDC, 4.3 inches, TFT color, 480x272 px, resistive, Ethernet Communication with the easyE4 via Ethernet
Common features of the model series			Ethernet interface USB Host
Display - Type			Color display, TFT
Touch-technology			Resistiv-Single-Touch
Number of colours			64 k Colours
Resolution		Pixel	480 x 272
Portrait format			no
Screen diagonal		Inch	4.3
Model			Plastic enclosure and glass panel in plastic frame
PLC-licence			no PLC function possible
License certificates for onboard interfaces			Not applicable
built-in interfaces			1 x Ethernet 100base-TX/10base-T 1 x USB host 2.0
Front type			Standard front with standard membrane (fully enclosed)
Utilization			Flush mounting
Pluggable communication cards (optional)			no
Touch sensor			Single-Touchdisplay
For use with			easyE4
For use with			EASY-E4-...-12... ab FW 1.30

## Technical data

### Display

Display - Type			Color display, TFT
Screen diagonal		Inch	4.3
Resolution		Pixel	480 x 272
Visible screen area		mm	95 x 54
Number of colours			64 k Colours
Contrast ratio (Normally)			Normally 500:1
Brightness		cd/m <sup>2</sup>	Normally 250
Back-lighting			LED dimmmable via software
Service life of back-lighting		h	Normally 40000
Resistive touch protective screen			Touch sensor (glass with foil)

### Operation

Technology			Resistive-Touch 4 wire
Touch sensor			Single-Touchdisplay

### System

Cooling			Fanless CPU and system cooling, natural convection-based passive cooling
---------	--	--	--

## Engineering

Visualisation software			Not required. Programmed ex works
PLC-licence			no PLC function possible

## Interfaces, communication

built-in interfaces			1 x Ethernet 100base-TX/10base-T 1 x USB host 2.0
USB Host			USB 2.0 (1.5 - 12 Mbit/s), not galvanically isolated
Ethernet			100Base-TX/10Base-T

## Power supply

Nominal voltage			24 V DC SELV (safety extra low voltage) PELV (protective extra low voltage)
Rated operational voltage	$U_e$	V	24 DC (-20%/+25%)
permissible voltage			Effective: 19.2-30.0 V DC (rated operating voltage -20%/+25%) Absolute with ripple: 18,0-31,2 V DC Battery powered: 18,0-31,2 V DC (rated operating voltage -25%/+30%) 35 V DC for a duration of < 100 ms
Voltage dips		ms	≤ 10 ms from rated voltage (24 V DC) 5 ms from undervoltage (19.2 V DC)
Note on power consumption			Basic device: 4.7 USB Slave to USB Host: 2.5 Total: 7,2
Note on heat dissipation			Heat dissipation with power consumption for 24 V, all ports and interfaces connected
Protection against polarity reversal			yes
Type of fuse			Yes (fuse not accessible)
Potential isolation			no potential isolation

## General

Housing material			Insulated material black
Front type			Standard front with standard membrane (fully enclosed)
Dimensions (W x H x D)		mm	136.4 x 100.5 x 37.8 ± 0.2
flush mounted			Clearance: W x H x D ≥ 30 mm (1.18")
Weight		kg	0.3
Degree of protection (IEC/EN 60529, EN50178, VBG 4)			IP65 (at front), IP20 (at rear)
Mechanical shock resistance		g	according to IEC 60068-2-27
Vibration			according to IEC/EN 60068-2-6
RoHS			conform

## Environmental conditions

Climatic environmental conditions			
Air pressure (operation)		hPa	795 - 1080
Temperature			
Storage / Transport	θ	°C	-20 - +60
Operating ambient temperature min.		°C	0
Operating ambient temperature max.		°C	+ 50
Relative humidity			
Condensation			Take appropriate measures to prevent condensation
Relative humidity			10 - 90%, non condensing

## Supply voltage $U_{Aux}$

Rated operational voltage	$U_{Aux}$	V	24 V DC (-20/+25%)
---------------------------	-----------	---	--------------------

## Design verification as per IEC/EN 61439

Technical data for design verification			
Static heat dissipation, non-current-dependent	$P_{Vs}$	W	7.2
Operating ambient temperature min.		°C	0
Operating ambient temperature max.		°C	50
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.

10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects		Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation		Please enquire
10.2.5 Lifting		Does not apply to enclosures without lifting aids.
10.2.6 Mechanical impact		Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions		Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES		Meets the product standard's requirements.
10.4 Clearances and creepage distances		Meets the product standard's requirements.
10.5 Protection against electric shock		Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components		Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections		Is the panel builder's responsibility.
10.8 Connections for external conductors		Is the panel builder's responsibility.
10.9 Insulation properties		
10.9.2 Power-frequency electric strength		Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage		Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material		Is the panel builder's responsibility.
10.10 Temperature rise		The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating		Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 Electromagnetic compatibility		Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 Mechanical function		The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

## Technical data ETIM 7.0





PLC's (EG000024) / Graphic panel (EC001412)		
Electric engineering, automation, process control engineering / Display and control component / Panel (HMI) / Graphic panel (HMI) (ecl@ss10.0.1-27-33-02-01 [AFX016003])		
Supply voltage AC 50 Hz	V	0 - 0
Supply voltage AC 60 Hz	V	0 - 0
Supply voltage DC	V	20.4 - 28.8
Voltage type of supply voltage		DC
Number of HW-interfaces industrial Ethernet		1
Number of interfaces PROFINET		0
Number of HW-interfaces RS-232		0
Number of HW-interfaces RS-422		0
Number of HW-interfaces RS-485		0
Number of HW-interfaces serial TTY		0
Number of HW-interfaces USB		1
Number of HW-interfaces parallel		0
Number of HW-interfaces Wireless		0
Number of HW-interfaces other		0
With SW interfaces		Yes
Supporting protocol for TCP/IP		Yes
Supporting protocol for PROFIBUS		No
Supporting protocol for CAN		No
Supporting protocol for INTERBUS		No
Supporting protocol for ASI		No
Supporting protocol for KNX		No
Supporting protocol for MODBUS		No
Supporting protocol for Data-Highway		No
Supporting protocol for DeviceNet		No
Supporting protocol for SUCONET		No
Supporting protocol for LON		No
Supporting protocol for PROFINET IO		No
Supporting protocol for PROFINET CBA		No
Supporting protocol for SERCOS		No

Supporting protocol for Foundation Fieldbus		No
Supporting protocol for EtherNet/IP		Yes
Supporting protocol for AS-Interface Safety at Work		No
Supporting protocol for DeviceNet Safety		No
Supporting protocol for INTERBUS-Safety		No
Supporting protocol for PROFI-safe		No
Supporting protocol for SafetyBUS p		No
Supporting protocol for other bus systems		No
Radio standard Bluetooth		No
Radio standard WLAN 802.11		No
Radio standard GPRS		No
Radio standard GSM		No
Radio standard UMTS		No
IO link master		No
Type of display		TFT
With colour display		Yes
Number of colours of the display		65.536
Number of grey-scales/blue-scales of display		0
Screen diagonal	inch	4.3
Number of pixels, horizontal		480
Number of pixels, vertical		272
Useful project memory/user memory	kByte	64
With numeric keyboard		Yes
With alpha numeric keyboard		Yes
Number of function buttons, programmable		0
Number of buttons with LED		0
Number of system buttons		1
Touch technology		Resistive touch
With message indication		Yes
With message system (incl. buffer and confirmation)		Yes
Process value representation (output) possible		Yes
Process default value (input) possible		Yes
With recipes		Yes
Number of password levels		200
With printer output		Yes
Number of online languages		100
Additional software components, loadable		Yes
Degree of protection (IP), front side		IP65
Degree of protection (NEMA), front side		4X
Operation temperature	°C	0 - 50
Rail mounting possible		No
Wall mounting/direct mounting		No
Suitable for safety functions		No
Width of the front	mm	136
Height of the front	mm	101
Built-in depth	mm	38


## Approvals

Specially designed for North America		No
--------------------------------------	--	----

## Dimensions

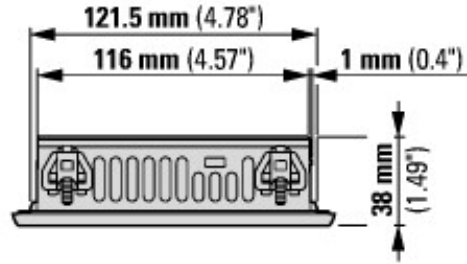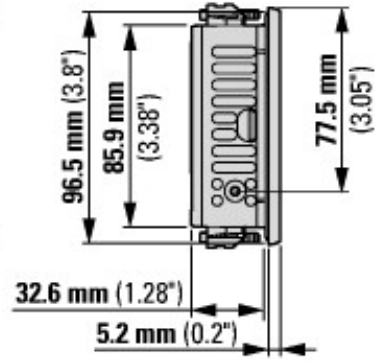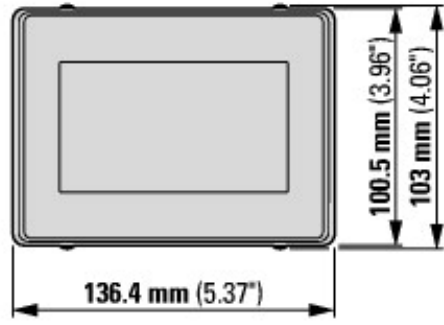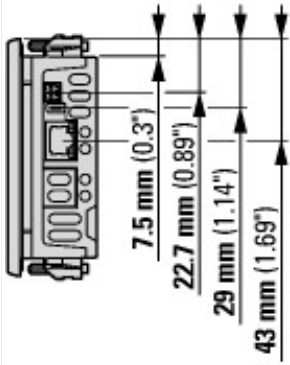

Tolerance  $\pm 0,2$  mm

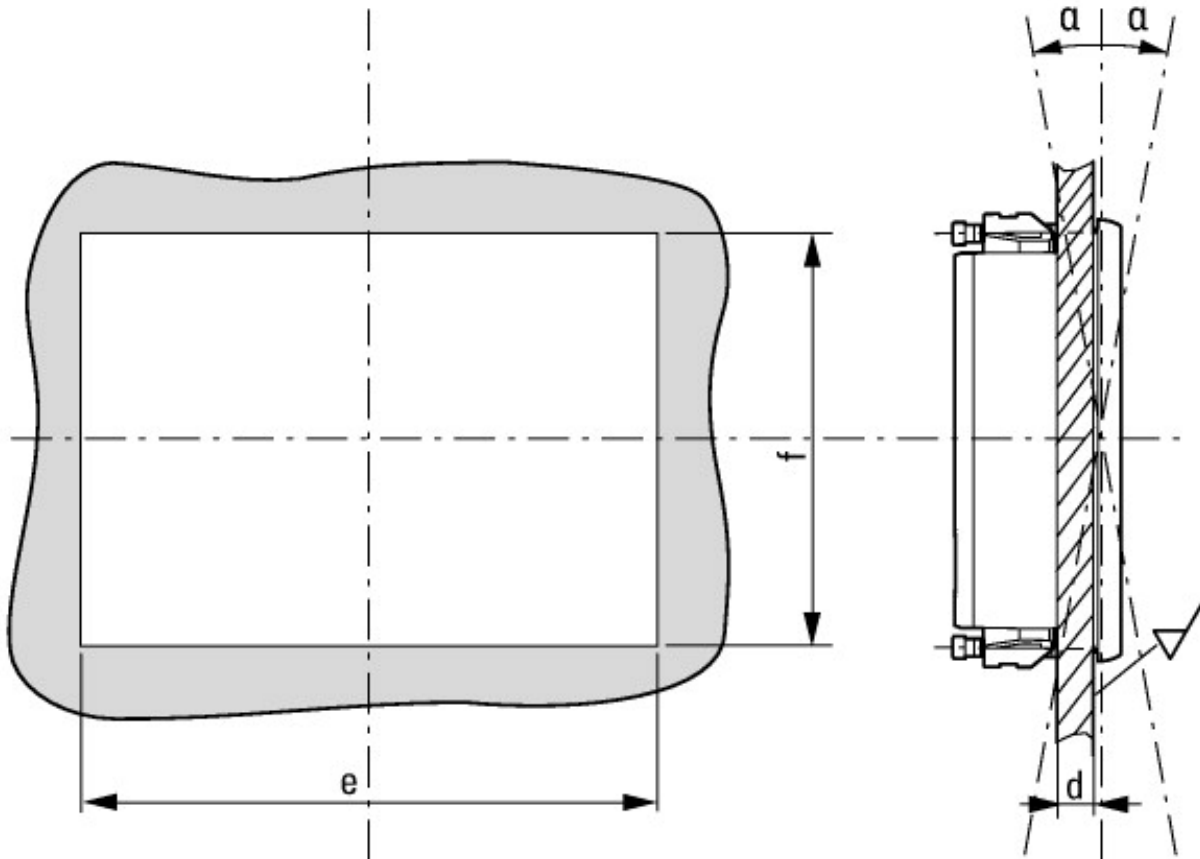

$e = 123 \text{ mm (4.84\"} \pm 1 \text{ mm (0.04\"} \text{)}, f = 87 \text{ mm (3.43\"} \pm 1 \text{ mm (0.04\"} \text{)}; a \text{ max. } \pm 90^\circ; 2 \text{ mm (0.08\"} \leq d \leq 5 \text{ mm (0.2\"}$