


DOUBLE INSULATION MODULAR BOX



CA-315

Polyamide box with polycarbonate transparent cover 270 x 135 x 130 mm



IEC-21305

IEC 60529

IEC 50102

IEC-20672



FEATURES

SafyBox CA

- Boxes & Cabinets made from polyamide.
- Colour Light Grey RAL 7035
- Self-extinguishability: 960° test withstanding. Halogen free. Double insulation. No electrical contact risks.
- Degree of protection Ip66 UNE 20324 (EN 60529).
- Certification of compliance with IEC62208 enclosure standard. Suitable for indoor or outdoor use.
- Reversibility for installation right or left door opening.
- Customise service: colour, machining, mounting accessories, locks, company logo.
- Lock 8mm screw seasables and vandalism-proof.
- Version with transparent, opaque & transparent.
- Polyester mounting plate back pannel optional.
- Resistant to harsh atmospheres.
- Light weight gives an easy installation.
- +10 years. Long life lasting without maintenance under standard environmental conditions.

Code	Description	Height x Width x Depth	Weight
CA-315	Empty standard box colour light grey and transparent cover	270 x 135 x 130 mm	0,77 Kg







DOUBLE INSULATION MODULAR BOX





CA-315

Polyamide box with polycarbonate transparent cover 270 x 135 x 130 mm

Standard
IEC
IEC-62208

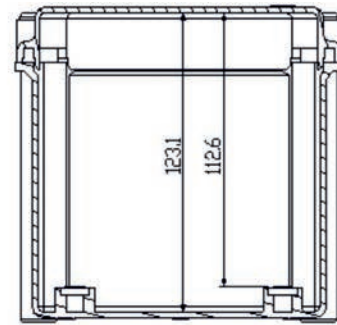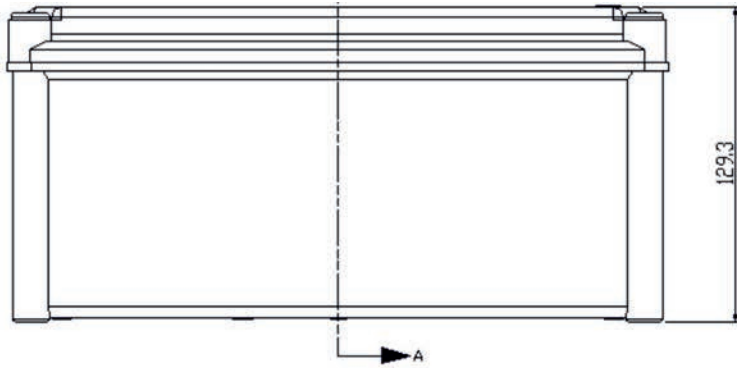

Seccion A-A

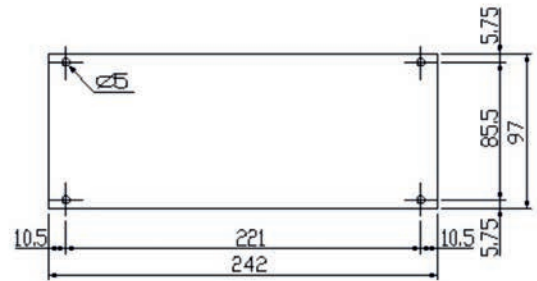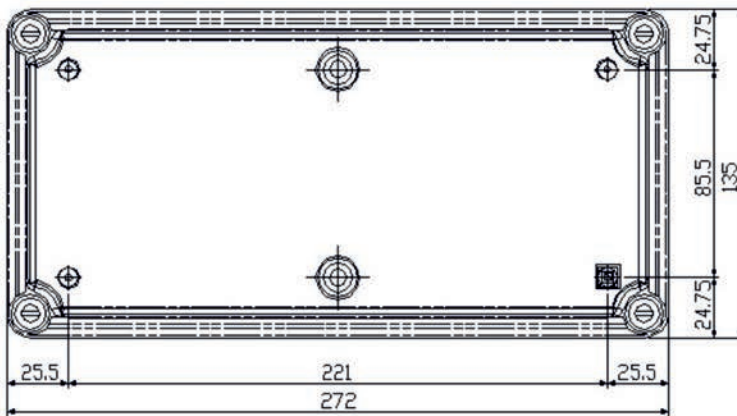

Packaging

packaging units	4	packaging height	550 mm	units per pallet 120x80 (h220)	
Screw cover number	4	packaging width	280 mm	units per pallet 110x110 (h220)	448
weight	0,77 Kg	packaging depth	130 mm		

Environmental performance

Minimum temperature	-30 °C	IP dust water protection degree IEC-60529	66
Maximum temperature	70 °C	IK impact protection degree IEC-50298	10
Compression resistance	100 kg		

Electrical performance

Nominal tension direct current up to:	1500 Vdc
Nominal tension alternative current up to:	1000 Vac
Maximum power dissipation At 40°C (wall surface)	24 W

Installation and assembly system

Inside installation	Yes	Wall surface	Yes
Outdoor installation	Yes	Floor mounting	No
Flush mounting	Yes	Pole mounting	No