

Technical Data Sheet:	DS067/0512
Product Description	FPC Contractor Pack: 10 Metres of Spiral reinforced PVC Conduit complete with 10x Nylon fittings and locknuts
Product Range	FPC - Flexible Conduit Contractor Pack

FLEXICON

FLEXIBLE CONDUIT SOLUTIONS

Roman Way, Coleshill
Birmingham
B46 1HG
Tel: 00 44 (0)1675 466900
Website: www.flexicon.uk.com




Size	Part No.
20mm	FPC-CP20B
25mm	FPC-CP25B

FPC Contractor Pack

- 10 Metres spiral reinforced PVC FPC20 or FPC25 conduit
- 10 MPC nylon fittings and locknuts



FPC Conduit with MPC fitting

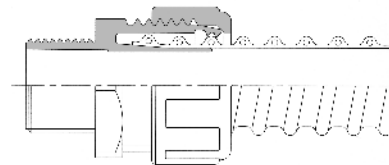

Material:

Conduit:
PVC
Fittings:
Nylon (PA66)

Colour:

Black (UV Resistant)

Fire Performance:

Self extinguishing

IP Rating:

- IP65

Applications:

- Conduit:**
- UV Resistant
 - Highly flexible
 - Accepts torsional movement
 - Smooth Internal Bore

Fittings:

- 2 part compression fitting
- Supplied complete with (nylon) locknut
- UV Resistant - Black
- Oil resistant

Comp. Strength:

60 kg

Pull Off Strength:

25kg

Temperature performance:

-5°C to +70°C




Conduit

Size (mm)	OD (mm)	ID (mm)	Min Bend radius R (mm)
20	21	16	35
25	27.5	22	45



Fitting & Locknut

Size (mm)	Metric Thread	Dimension (mm)				
	A	B	C	D	E	F (A/F)
20	M20 x 1.5	14	29	33	14.5	30
25	M25 x 1.5	15	30	42	19.0	37

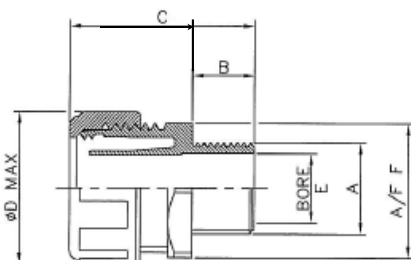

Compliance, Approvals & Accreditation;



EN 61386 Classification Available on request

Typical Applications;



Machinery and OEM's

Errors, omissions and amendments excepted. As part of continuing product development Flexicon Ltd reserve the right to alter product specifications without prior notice. Data given is correct at time of compilation. Product specification and application data is for guidance only and does not constitute a warranty of any kind, either expressed or implied for Flexicon products or their suitability for a specific purpose. Third party approvals maybe limited to certain sizes within a product range.

Created by; Colin Legg - Marketing Manager	Approved by; Ian Gibson - Technical Director	Date; May 2012	Page Number; Page 1 of 1
--	--	--------------------------	------------------------------------