

SNE3 RCD Sockets & Spurs

Technical Specification

RCD Type	Latching / Passive
Voltage Rating	240v AC 50Hz
Current Rating	13A
Rated Tripping current	30mA
Breaking Capacity	250A
Short Circuit Withstand	1500A
Ambient operating Temp:	-5°C to +40°C
Operating speed	<40mS
Contact Break	Double Pole
Minimum Box Depth	35mm
Cable Capacity	5x2.5mm ² / 2x4mm ² / 1x6mm ²



SNE3-1130FS



SNE3-1130SP



SNE3-2130FS




SNE3-2130SM



SNE3-2230SM

Part No.	Description
SNE3-1130FS	RCD Fused Spur Plastic
SNE3-1130SP	1-Gang, Switched Plastic RCD Socket
SNE3-1230SP	2-Gang, Switched Plastic RCD Socket
SNE3-2130FS	RCD Fused Spur Metal with Surface Mount Box
SNE3-2130SM	1-Gang, Switched Metal RCD Socket with Surface Mount Box
SNE3-2230SM	2-Gang, Switched Metal RCD Socket with Surface Mount Box

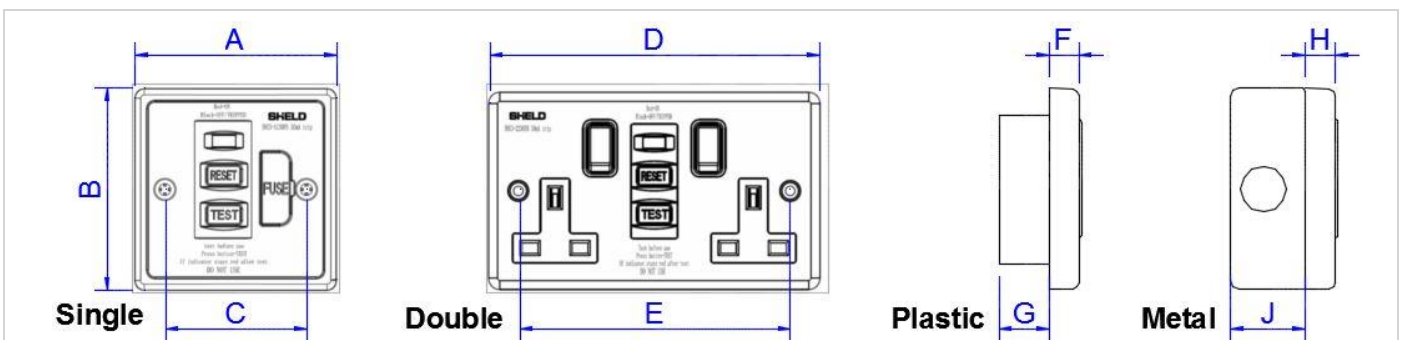

SNE3 DIMENSIONS (mm)

Part No.	A	B	C	D	E	F	G	H	J	Metal	Plastic
SNE3-1130FS	86	86	60.3	-	-	14.5	21	-	-	-	✓
SNE3-1130SP	86	86	60.3	-	-	14.5	21	-	-	-	✓
SNE3-1230SP	-	-	-	146	120.6	14.5	21	-	-	-	✓
SNE3-2130FS	86	86	60.3	-	-	-	-	14.5	38	✓	-
SNE3-2130SM	86	86	60.3	-	-	-	-	14.5	38	✓	-
SNE3-2230SM	-	86	-	146	120.6	-	-	14.5	38	✓	-