


Data sheet | Item number: 2273-500

Mounting carrier; for single- and double-row con.; 2273 Series; for DIN-35 rail mounting/screw mounting; orange



www.wago.com/2273-500

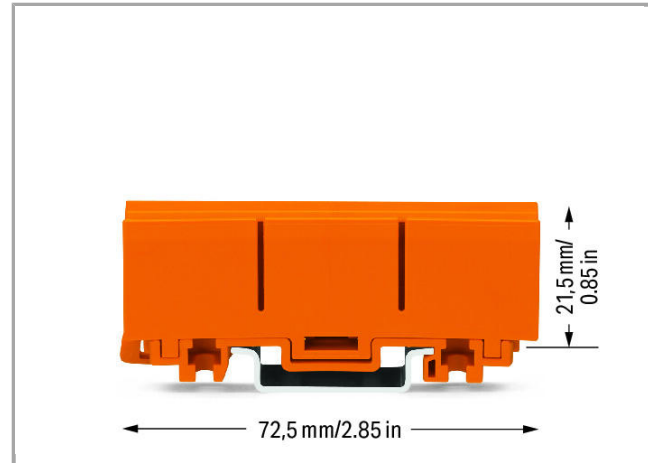

Item description

Note:

One single carrier can hold up to 24 clamping units in a very narrow space. Previously, this was only possible using rail-mount terminal blocks.

Advantages:

- Mount carrier onto DIN-35 rail or via screws – easily and quickly
- Accommodate three 2.5 mm² (12 AWG) 2273 Series
- Connectors in a single carrier
- Easily exchange connectors
- Large marking area for self-adhesive marking strips or for direct marking with permanent felt-tip pen

Data

Geometrical Data

Width	18.5 mm / 0.728 inch
Height from upper-edge of DIN-35 rail	21.5 mm / 0.846 inch
Depth	72.5 mm / 2.854 inch

Material Data


Color	orange
Fire load	0.322 MJ
Weight	10.74 g

Commercial data

Product Group	7 (Push Wire Conn.)
Country of origin	DE
GTIN	4050821101871

Approvals / Certificates

Ship Approvals

Logo	Approval	Additional Approval Text	Certificate name
	DNV GL Det Norske Veritas, Germanischer Lloyd	EN 60998	TAE000015T

Downloads

Documentation

Additional Information

Technical explanations	2019-04-03	pdf 2.1 MB	Download
------------------------	------------	---------------	----------

CAD/CAE - Smart Data

CAD data

3D Download 2273-500	URL	Download
----------------------	-----	----------

EPLAN

EPLAN Data Portal	Download
-------------------	----------

WSCAD

WSCAD Universe	Download
----------------	----------

Subject to changes.