



Product designation				Power contactor
Product type designation				BF09
<b>Contact characteristics</b>				
Number of poles	nr.			4
Rated insulation voltage U <sub>i</sub>	V			690
Rated impulse withstand voltage U <sub>imp</sub>	kV			6
Operating frequency	Operational frequency min	Hz	25	
	Operational frequency max	Hz	400	
	Conventional free air thermal current I <sub>th</sub>	A	25	
Operating current	Operational current AC1 (≤40°C)	A	25	
	Operational current AC3 (≤440V ≤55°C)	A	9	
	Operational current AC4 (400V)	A	4.9	
Rated operational power AC1 (T≤40°C)	230V	kW	9.5	
	400V	kW	16	
	500V	kW	21	
	690V	kW	27	
Rated operational power AC3 (T≤55°C)	230V	kW	2.2	
	400V	kW	4.2	
	415V	kW	4.5	
	440V	kW	4.8	
	500V	kW	5.5	
	690V	kW	7.5	
Short-time allowable current for 10s (IEC/EN60947-1)	A			150
Protection fuse	gG (IEC)	A	25	
	aM (IEC)	A	10	
Making capacity (RMS value)	A			90
Breaking capacity at voltage	Breaking capacity 440V	A	72	
	Breaking capacity 500V	A	72	
	Breaking capacity 690V	A	71	
Resistance per pole (average value)	mΩ			2.5
Power dissipation per pole (average value)	Power dissipation pole (average value) I <sub>th</sub>	W	1.6	
	AC3	W	0.2	
Tightening torque for terminals	min	Nm	1.5	
	max	Nm	1.8	
	min	lbft	1.1	
	max	lbft	1.5	
Tightening torque for coil terminal				

	min	Nm	0.8
	max	Nm	1
	min	lbft	0.8
	max	lbft	0.74
max number of wires simultaneously connectable		nr.	2
Conductor section	AWG		
	min		16
	max		10
Flexible w/o lug conductor section	min	mm <sup>2</sup>	1
	max	mm <sup>2</sup>	6
Flexible c/w lug conductor section	min	mm <sup>2</sup>	1
	max	mm <sup>2</sup>	4
Flexible with insulated spade lug conductor section	min	mm <sup>2</sup>	1
	max	mm <sup>2</sup>	4
Power terminal protection according to IEC/EN 60529			IP20 when wired
<b>Auxiliary contact characteristics</b>			
Operational current AC1 (≤40°C)		A	25
Operating current DC13	110V	A	Screw / DIN rail 35mm
<b>Ambient conditions</b>			
Temperature	Operating temperature		
	min	°C	-50
	max	°C	70
	Storage temperature		
	min	°C	-60
	max	°C	80
Max altitude		m	3000
Operating position	normal allowable		Vertical plan ±30°
Mounting			Screw / DIN rail 35mm
Weight		g	0.502
<b>Operations</b>			
Mechanical life		Cycles	20000000
Electrical life		Cycles	2000000
<b>Safety related data</b>			
Performance level B10d according to EN/ISO 13489-1	rated load mechanical load	Cicli Cicli	2000000 20000000
Mirror contats according to IEC/EN 609474-4-1			yes
EMC compatibility			yes
<b>DC coil operating</b>			
DC rated control voltage	min	V	6
	max	V	250
DC operating voltage			

pick-up	min	%Us	0.8
	max	%Us	1.10
drop-out	min	%Us	0.1
	max	%Us	0.40

Average coil consumption  $\leq 20^{\circ}\text{C}$

in-rush	W	2.4
holding	W	2.4

**Max cycles frequency**

Mechanical operations Cycles/h 3600

**Operating times**

Average time for Us control

in AC	Closing NC	min	ms	14
		max	ms	28
	Opening NC	min	ms	7
		max	ms	18
in DC	Closing NO	min	ms	75
		max	ms	91
	Opening NO	min	ms	15
		max	ms	19

**UL technical data**

Full-load current (FLA) for three-phase AC motor

at 480V	A	7.6
at 600V	A	0.375

Yielded mechanical performance

for single-phase AC motor

at 110/120V	hp	0.75
at 230V	hp	2

for three-phase AC motor

at 200/208V	hp	3
at 220/230V	hp	3
at 460/480V	hp	5
at 575/600V	hp	7.5

General USE


Contactor

AC current	A	25
------------	---	----


**Other features**

Pollution degree 3

**Dimensions**

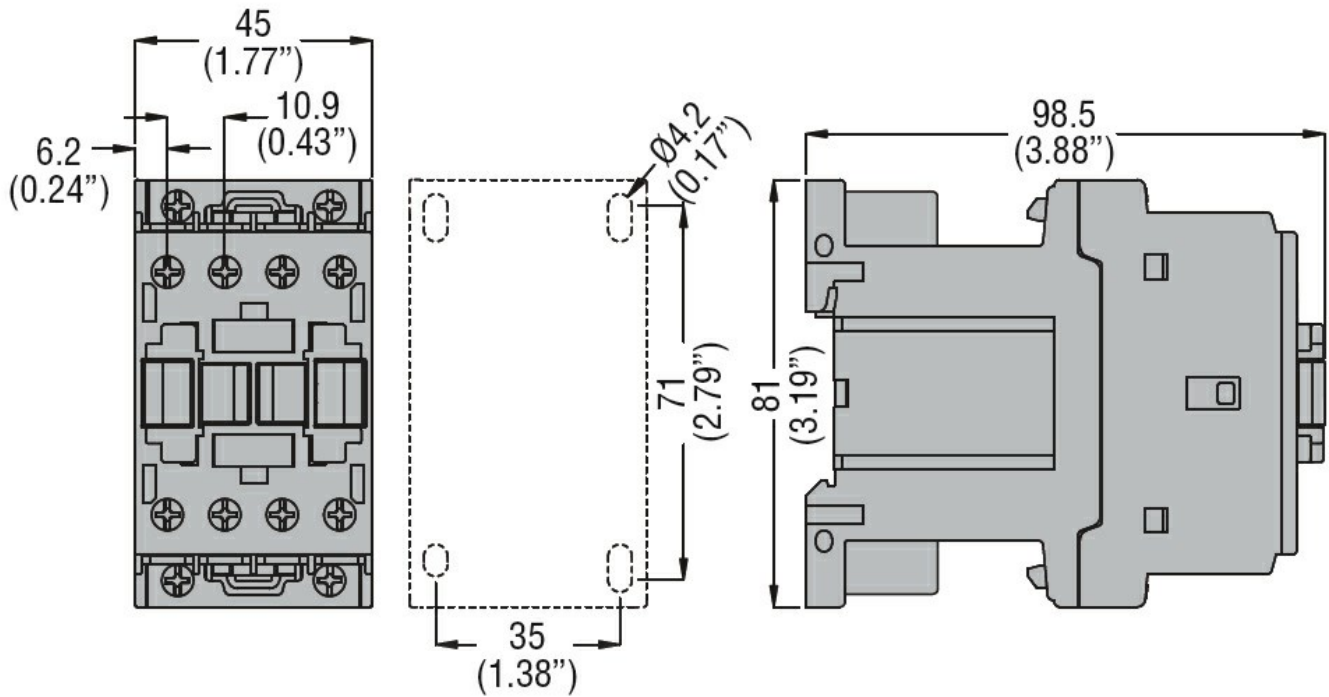

### Wiring diagrams

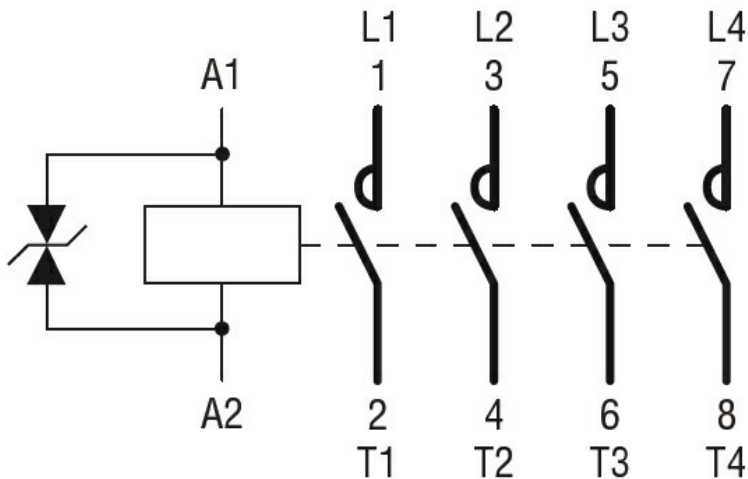

### Certifications and compliance

#### Certifications

CSA C22.2 n° 60947-1  
CSA C22.2 n° 60947-4-1  
IEC/EN 60947-1  
IEC/EN 60947-4-1  
UL 60947-1  
UL 60947-4-1

#### Compliance

CCC  
cULus  
EAC

### ETIM 6 classification

EC000066 - Power contactor, AC switching