



RJ45 interface,
Ethernet
connection type
LPCD0

Product designation

Product type designation

General characteristics

Material	Polyamide
IEC degree of protection	IP65 on front and IP20 on rear

Electrical characteristics

Rated insulation voltage U_i IEC/EN	V	24VAC
Contact resistance	mΩ	≤40

Mechanical features

Weight	g	26
--------	---	----


UL technical data

UL degree of protection	1, 2, 3R, 4, 4X, 12, 12K on front
-------------------------	-----------------------------------


Ambient conditions

Temperature	Operating temperature	min	°C	-25
		max	°C	+70
	Storage temperature	min	°C	-40
		max	°C	+85

Dimensions

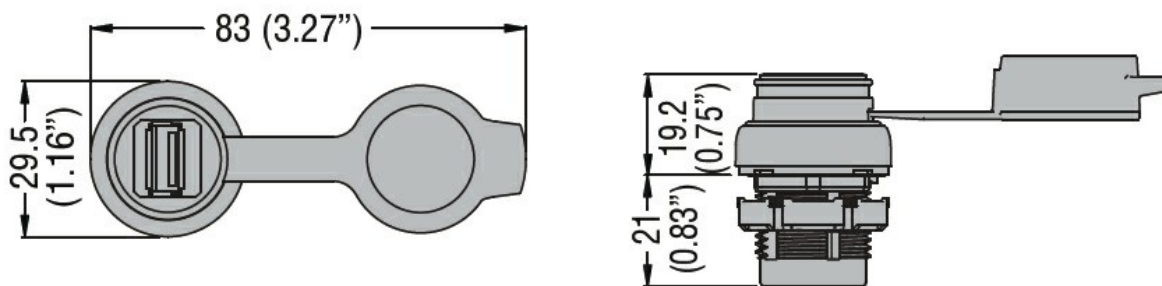

Wiring diagrams

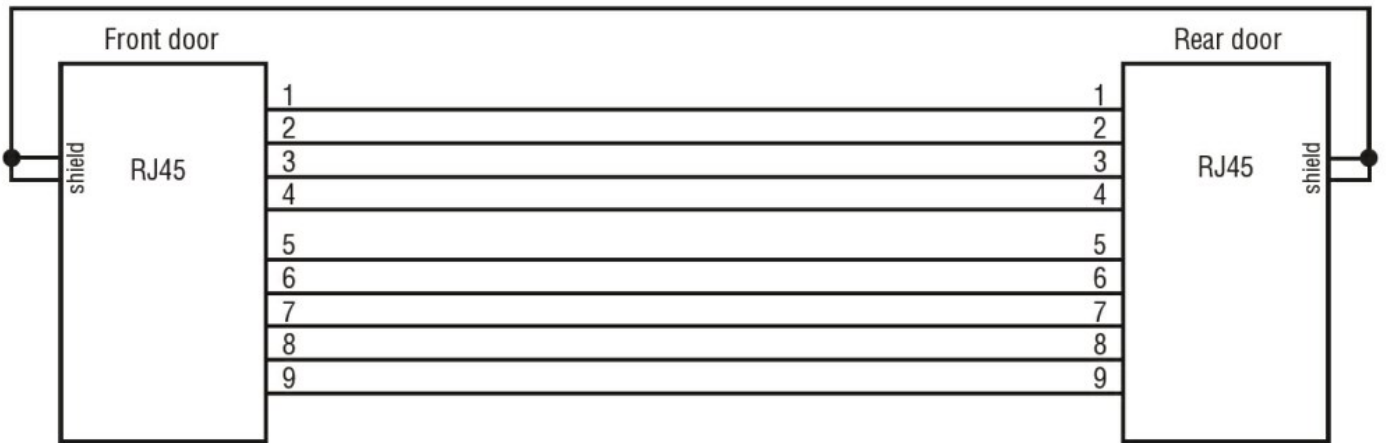

Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN 60947-1

IEC/EN 60947-5-1

UL508

Certificates

cULus

EAC