



+ INFORMATION

- + Closed, permanent grip and adjustable marker sleeves
- + For applications including electrical engineering, pneumatics and hydraulics
- + Twist-protection for secure combination marking
- + Excellent legibility

+ PROPERTIES

Temperature range

PA: -30°C to +60°C

PAZ: -30°C to +90°C

Material

PA: PVC

PAZ: ZEREX (Halogen free)

Print

hot stamped

Standard colours


PA: yellow and white

international colour code for 0-9


PAZ: yellow and white

Text

0-9, A-Z, + - / : ~ ↓

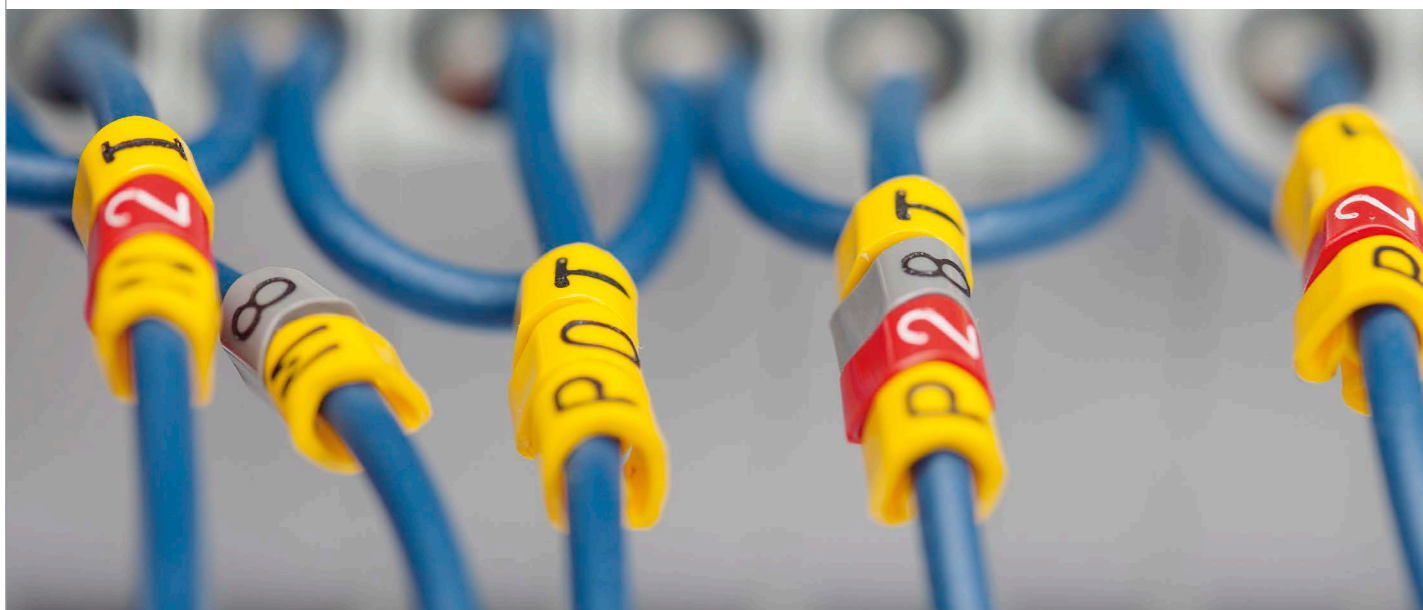

+ DIMENSIONS

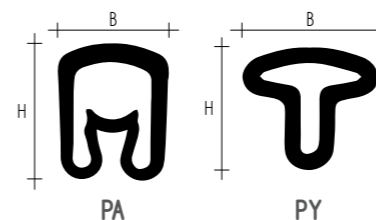

| TYPE | HEIGHT (H mm) | WIDTH (B mm) | TEXT HEIGHT (mm) |
|-------|---------------|--------------|------------------|
| PY-01 | 33 | 35 | 26 |
| PA-02 | 36 | 35 | 26 |
| PA-1 | 55 | 4.2 | 26 |
| PA-2 | 9.5 | 6.6 | 4.0 |
| PA-3 | 16.5 | 11.0 | 4.0 |

+ SIZES AND PACKAGING

| TYPE | DIAMETER / AREA* | LENGTH | NUMBER OF CHARACTERS | PACKAGING |
|-------------|--|--------|----------------------|--|
| PY-01 | ~10 - 2.0 mm ~0.2 - 0.7 mm ² | 3 mm | 1 | bag of 5x200 pcs - cut roll of 1000 pcs |
| PA-02/PAZ02 | ~13 - 3.0 mm 0.5 to 0.75 mm ² | 3 mm | 1 | bag of 5x200 pcs - cut disc of 500 pcs |
| PA-1/PAZ1 | ~25 - 5.0 mm 0.75 to 4.0 mm ² | 3 mm | 1 | bag of 5x200 pcs - cut disc of 500 pcs |
| PA-2/PAZ2 | ~4.0 - 10.0 mm 2.5 to 10.0 mm ² | 4 mm | 1 | bag of 5x100 pcs - cut disc of 250 pcs |
| PA-3/PAZ3 | ~8.0 - 16.0 mm 16.0 to 50.0 mm ² | 6 mm | 1 | bag of 5x20 pcs - cut |

* Size shown refers to BS6231 tri-rated cable.

+ RELATED PRODUCTS



MD/MDH
PAGE 87



CAS
PAGE 86



PUJ/MD10
PAGE 89

+ APPLICATION

