


Fixing



Characteristics	Floor-mounting pillar	Wall-fixing lugs	Post-fixing device	Blanking plates
	To protect cables entering the enclosure in outdoor installations. Cable entry section: 165 x 100 mm. For enclosures ref. NSYPLM54G, NSYPLM54TG, NSYPLM64G and NSYPLM64TG.	Set of 4 wall-fixing lugs. Mounted directly on the enclosure, either in horizontal position or in vertical position.	For outdoor installations on a post with a maximum circumference of 675 mm, Ø 215 mm.	They are positioned on the rear surface of the enclosures to block the openings in the corners in order to improve their appearance or prevent the entry of unwanted elements in the ventilation shaft. Supplied as standard for enclosure, ref. NSYPLM108G.
Material	Polyester reinforced with fibreglass	Polyamide loaded with fibreglass	Stainless-steel	Galvanised steel
Colour	RAL 7035 grey	RAL 7035	-	RAL 7035
Maximum load	-	<ul style="list-style-type: none"> ■ On PLM32 □ vertical or horizontal: 10 kg ■ Other PLM models □ vertical position: 200 kg □ horizontal position: 100 kg 	100 kg	-
Supply	Delivered with steel frame for secure fixing to the floor	Delivered with fixings	Supply of the rail, the strips and the fixings	-
	Reference	References	For wall-mounting enclosure	References
	NSYSFSPLMG	NSYFPFLMG NSYFPFLM32G (1)	NSYPLM43G NSYPLM54G & NSYPLM64G NSYPLM75G NSYPLM86G	NSYSFP300 NSYSFP400 NSYSFP500 NSYSFP600
		NSYFPXPLM		NSYPLM32G NSYPLM43G & NSYPLM54G NSYPLM64G, 75G and 86G -
				NSYCEPLMAG NSYCEPLMBG NSYCEPLMCG -

(1) Exclusive for enclosures ref. **NSYPLM32G** and **NSYPLM32TG.**

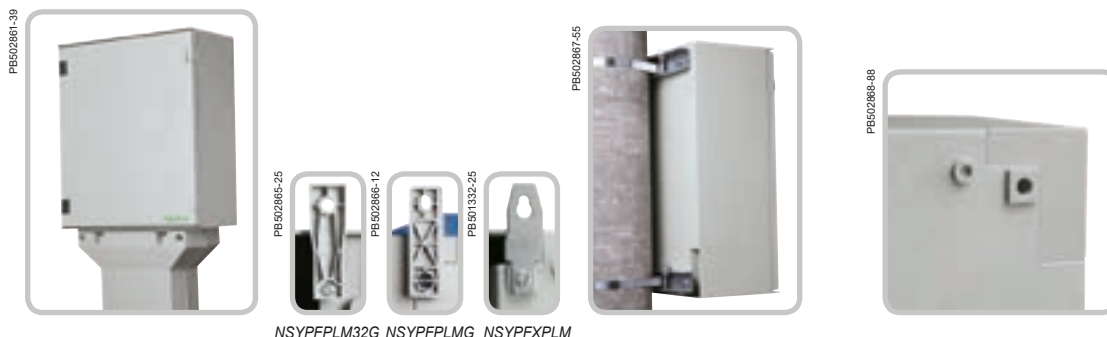

Main

Range	Thalassa
Accessory / separate part category	Fixing accessory
Product or component type	Post fixing device
Application	Multi-purpose
For enclosure nominal dimensions	747 mmW: 536 mm D: 300 mm
Mounting location	Rear of enclosure Outdoor installations on a post
Range compatibility	Thalassa PLM
Device composition	fixing elements 2 support rail 2 strip

Complementary

Material	Galvanised steel
Fixing mode	By fixing element - on a post location
Permanent permissible load	100 kg
Height	45 mm
Width	495 mm
Depth	32.5 mm
Diameter	215 mm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration

Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration Pro-active China RoHS declaration (out of China RoHS legal scope)
Environmental Disclosure	Product Environmental Profile

Contractual warranty

Warranty	18 months
----------	-----------