



### Main

|  |                      |
|--|----------------------|
| Range of product                             | Zelio Relay          |
| Series name                                  | Universal            |
| Product or component type                    | Plug-in relay        |
| Device short name                            | RUM                  |
| Contacts type and composition                | 3 C/O                |
| [Uc] control circuit voltage                 | 24 V AC              |
| [Ithe] conventional enclosed thermal current | 10 A at -40...55 °C  |
| Status LED                                   | With                 |
| Control type                                 | Lockable test button |
| Utilisation coefficient                      | 20 %                 |

### Complementary

|  |  |
|--|--|
| Shape of pin                           | Cylindrical  |
| [Ui] rated insulation voltage          | 250 V conforming to IEC<br>300 V conforming to UL<br>300 V conforming to CSA   |
| [Uimp] rated impulse withstand voltage | 4 kV (1.2/50 µs)   |
| Contacts material                      | AgNi   |
| [Ie] rated operational current         | 10 A at 28 V DC (NO) conforming to IEC<br>10 A at 250 V AC (NO) conforming to IEC<br>5 A at 28 V DC (NC) conforming to IEC<br>5 A at 250 V AC (NC) conforming to IEC<br>10 A at 30 V DC conforming to UL<br>10 A at 277 V AC conforming to UL<br>10 A at 30 V DC conforming to CSA<br>10 A at 277 V AC (same polarity) conforming to CSA |
| Maximum switching voltage              | 250 V conforming to IEC  |
| Resistive rated load                   | 10 A at 250 V AC<br>10 A at 28 V DC  |
| Maximum switching capacity             | 2500 VA/280 W  |
| Minimum switching capacity             | 170 mW at 10 mA, 17 V  |
| Operating rate                         | <= 18000 cycles/hour no-load<br><= 1200 cycles/hour under load   |
| Mechanical durability                  | 5000000 cycles   |
| Electrical durability                  | 100000 cycles for resistive load   |
| Average coil consumption in VA         | 3 at 60 Hz   |
| Drop-out voltage threshold             | >= 0.15 U <sub>c</sub> AC  |
| Operate time                           | 20 ms at nominal voltage   |
| Release time                           | 20 ms at nominal voltage   |
| Average coil resistance                | 72 Ohm at 20 °C +/- 15 %   |
| Rated operational voltage limits       | 19.2...26.4 V AC   |
| Protection category                    | RT I   |
| Test levels                            | Level A group mounting   |
| Safety reliability data                | B10d = 100000  |
| Operating position                     | Any position   |
| Product weight                         | 0.086 kg   |
| Device presentation                    | Complete product   |


## Environment

|                                       |  |
|---------------------------------------|--|
| Dielectric strength                   | 2000 V AC between poles with basic insulation<br>1500 V AC between contacts with micro disconnection insulation<br>2500 V AC between coil and contact with reinforced insulation |
| Product certifications                | CSA<br>RoHS<br>UL<br>REACH<br>EAC  |
| Standards                             | EN/IEC 61810-1<br>UL 508<br>CSA C22.2 No 14  |
| Ambient air temperature for storage   | -40...85 °C  |
| Ambient air temperature for operation | -40...55 °C  |
| Vibration resistance                  | 3 gn (f = 10...150 Hz), amplitude +/- 1 mm (on 5 cycles in operation)<br>4 gn (f = 10...150 Hz), amplitude +/- 1 mm (on 5 cycles not operating)                                  |
| IP degree of protection               | IP40   |
| Pollution degree                      | 2  |
| Shock resistance                      | 10 gn for 11 ms in operation conforming to EN/IEC 60068-2-27<br>10 gn for 11 ms not operating conforming to EN/IEC 60068-2-27  |

## Offer Sustainability

|                                  |  |
|----------------------------------|--|
| Sustainable offer status         | Green Premium product  |
| RoHS (date code: YYWW)           | Compliant - since 1430 - Schneider Electric declaration of conformity <a href="#">Schneider Electric declaration of conformity</a> |
| REACH                            | Reference not containing SVHC above the threshold  |
| Product environmental profile    | Available <a href="#">Product Environmental Profile</a>  |
| Product end of life instructions | Need no specific recycling operations  |


## Dimensions

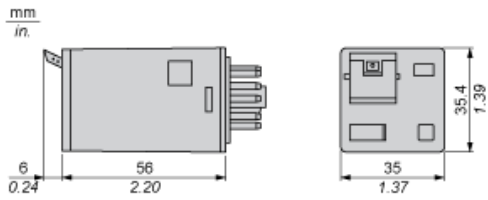

## Wiring Diagram



## Wiring Diagram




Symbols shown in blue correspond to Nema marking.

Electrical Durability of Contacts

Durability (inductive load) = durability (resistive load) x reduction coefficient.

Resistive AC load

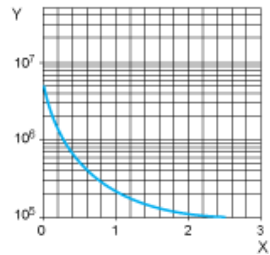

X Switching capacity (kVA)


Y Durability (Number of operating cycles)

Reduction coefficient for inductive AC load (depending on power factor  $\cos \phi$ )



Y Reduction coefficient (A)

Maximum switching capacity on resistive DC load

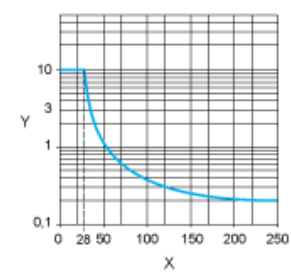

X Voltage DC

Y Current DC

Note : These are typical curves, actual durability depends on load, environment, duty cycle, etc.