

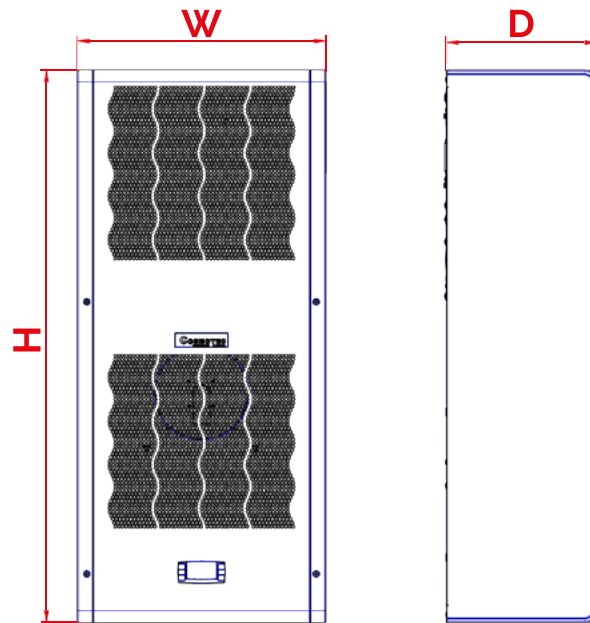





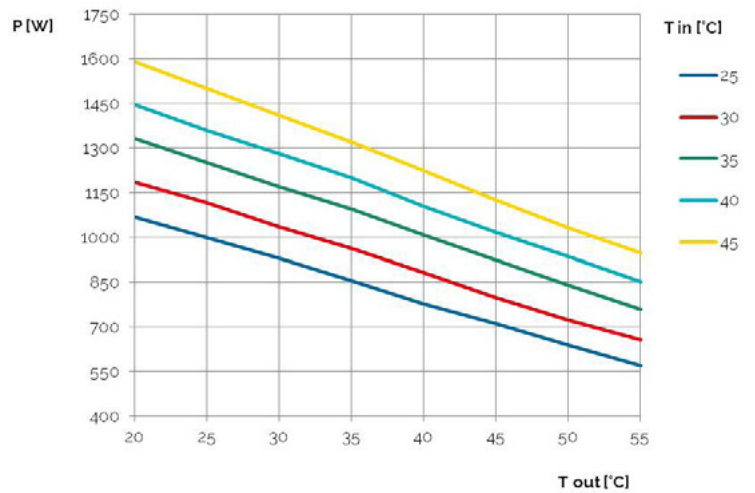


Protherm Indoor - CVE11

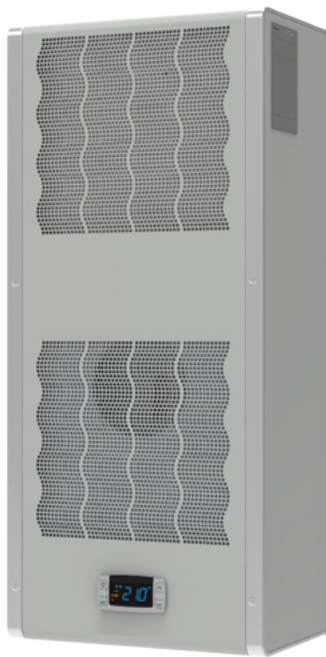

CODICE	M.U.	CVE11002208000	CVE11002288000	CVE11U12038000	CVE11U12208000
Potenza di raffreddamento - Cooling Capacity - Kälteleistung - Capacidad de refrigeración L35L35 - N14511-2	W	1100 - 1150	1050 - 1100	1150	1150
Potenza di raffreddamento - Cooling Capacity- Kälteleistung - Capacidad de refrigeración L35L50 - EN14511-2	W	840 - 890	790 - 840	890	890
Alimentazione - Power Supply - Spannungsversorgung - Alimentación eléctrica	V-ph-Hz	230-1-50/60	400-2-50 460-2-60	115-1-60	230-1-50/60
UL		--	--	•	•
Altezza/Larghezza/Profondità - Height/Width/Depth - Höhe/Breite/Tiefe - Altura/Ancho/Profundidad (HxWxD)	mm	913x413x248	913x413x248	913x413x248	913x413x248
Corrente assorbita - absorbed current - Stromaufnahme - Corriente absorbida (I)	A	2,5 - 3	1,3 - 1,4	7,5	3,6
Corrente assorbita alla partenza - Starting Current - Anlaufstrom - Corriente de arranque	A	20	40	34	20
Fusibile T - T PreFuse - Absicherung - Fusibile T	A	6	4	15	15
Potenza Assorbita - Power Consumption - Leistungsaufnahme - Potencia Absorbida L35L50 - EN14511-2	W	510 - 650	510 - 650	650	650
Portata aria lato armadio, bocca libera - Cabinet fan flow, free blowing Luftleistung Schrankseite, freiblasend - Caudal del ventila- dor, soplado directo	m³/h	540 - 580	540 - 580	580	580
Limiti regolazione Temperatura - Cabinet Temperature Limits- Temperatur Einstellbereich - Limites de temperatura en el armario	°C	+25 / +45	+25 / +45	+25 / +45	+25 / +45
Limiti Temperatura lato Ambiente - Ambient Temperature Limits Grenzwerte Umgebungtemperatur - Limites de temperatura ambiente	°C	+20 / +55	+20 / +55	+20 / +55	+20 / +55
Protezione lato armadio - Cabinet Protection Degree - Schutzgrad Schrankseite - Clase de protección del armario	IP/Type	54 / -	54 / -	- / 12	- / 12
Rumorosità - Noise Level - Geräuschpegel - Nivel de ruido	dB(A)	65	65	65	65
Peso - Weight - Gewicht - Peso	kg	44	50	44	44

(I) (CE= L35L35 - UL = Max)

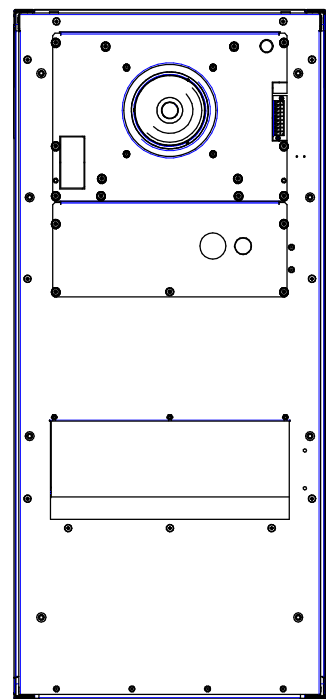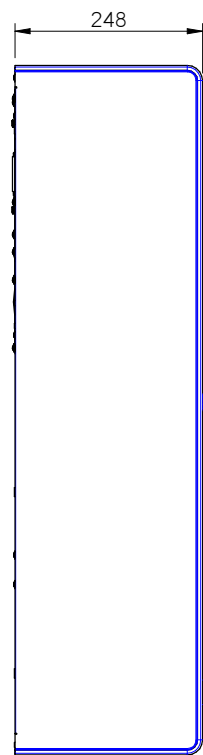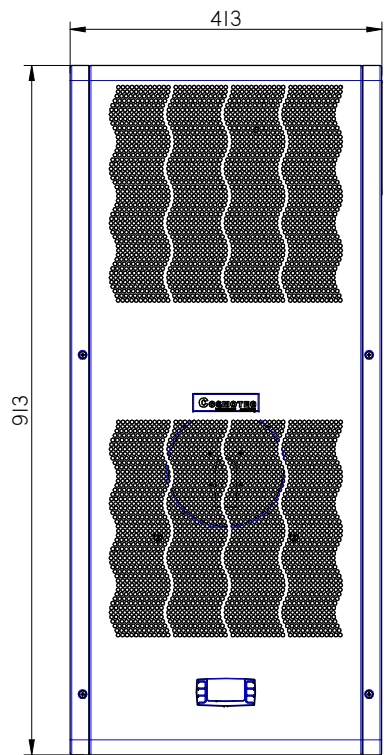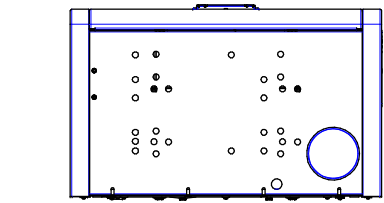

-TOLLERANZE GENERALI: REF. UNI EN27681-1-01 -TOLLERANZE GEOMETRICHE: REF. UNI EN27681/2-K -SALDATURE: REF. UNI EN ISO 4063 EN25533		PRESSIONE -	PULSORE -	DIST. MONTAG. -	COL. / 1 / 1	SERIE / CVA	
PZS 0,6 kg	MOD. QUOTA ERA 410(C6)	DATA CREA 19/12/2016	DATA 19/12/2016	STATO Prezzi	AUTORE Manzoni		
-INDICAZIONI GENERALI: Simboli n. q. : 0,5x45 Raggi n. q. : R1		1	1	1	1	1	1
STULZ LAY-OUT							