


Stainless-steel wall-mounting enclosures


Accessories

PB501238_1



Canopy

Material		304L stainless-steel sheet								
Finish		Scotch-Brite® brushed								
Thickness		15/10* mm								
Installation		Direct fixing to the body of the enclosure								
Supply		Delivered with the fixings required for installation								
No. of locks	No. of doors	For wall-mounting enclosures (mm)			Dimensions (mm)					References
		Height	Width	Depth	A	B	C	D	E	
1	1	300	200	150	205	183	51	120	-	NSYTX2015
			250	150	205	183	51	120	-	NSYTX2515
			300	150	305	183	51	220	-	NSYTX3015
		400	300	150	305	183	51	220	-	NSYTX3015
			300	200	305	233	51	220	70	NSYTX3020
			400	200	405	233	70	320	70	NSYTX4020
2	1	500	400	200	405	233	70	320	70	NSYTX4020
			400	200	405	233	70	320	70	NSYTX4020
			600	250	605	283	70	520	120	NSYTX6025
*	2	600	1000	300	1005	333	70	920	170	NSYTX10030
			1200	300	1205	333	70	1120	120	NSYTX12030
2	1	700	500	250	505	283	70	420	120	NSYTX5025
			600	250	605	283	70	520	120	NSYTX6025
			800	300	805	333	70	720	170	NSYTX8030
*	2	800	1000	300	1005	333	70	920	170	NSYTX10030
			1200	300	1205	333	70	1120	120	NSYTX12030
2	1	1000	800	300	805	333	70	720	170	NSYTX8030
*	2	1000	1000	300	1005	333	70	920	170	NSYTX10030
2	1	1200	800	300	805	333	70	720	170	NSYTX8030
*	2	1200	1000	300	1005	333	70	920	170	NSYTX10030

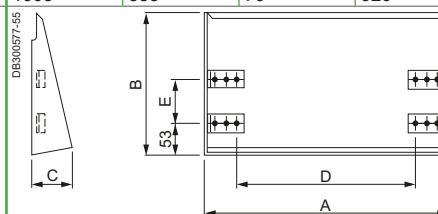

* Three-point locking system.

PB501821-18



Support bracket for enclosure with anti-tilt kit and reinforcement

The support bracket is used when the S3HF enclosure cannot be hung from a wall or a post.
Suitable for outdoor use.
Maxi. enclosure dimensions: 1000 x 800 x 300 mm.
Floor attachment by standard M12 fastenings.

Material: acier
Finish: peint
Colour: RAL 7035 grey
Maximum load: 120 kg

Height (mm)	References
1400	NSYOCNS1400
1800	NSYOCNS1800

PB502979-16



Wall-fixing lugs

Material	304L stainless-steel	316L stainless-steel
Installation	<ul style="list-style-type: none"> ■ Mounting of the wall-fixing lugs in horizontal or vertical position ■ Fixing from the outside ■ Wall-enclosure separation of 12 mm 	
Maximum load	250 kg	
Supply	Set of four wall-fixing lugs	
References	NSYPFCX	NSYPFC2X

DB300873

