### **DATASHEET - T3-4-15682/12/SVB**



Main switch, T3, 32 A, surface mounting, 4 contact unit(s), 6 pole, 1 N/ 0, 1 N/C, Emergency switching off function, With red rotary handle and yellow locking ring, Lockable in the 0 (Off) position



T3-4-15682/I2/SVB Part no.

Catalog No. 207210

	EL-Nummer (Norway)	1457830		
Delivery program				
Product range				Main switch maintenance switch Repair switch
Part group reference				Т3
Stop Function				Emergency switching off function
				With red rotary handle and yellow locking ring
Number of poles				6 pole
Auxiliary contacts				
1			N/O	1
7			N/C	1
Locking facility				Lockable in the 0 (Off) position
Degree of Protection				IP65
				totally insulated
Design				surface mounting
Contact sequence				0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
Switching angle			0	90
Design number				15682
Function				OFF O
Motor rating AC-23A, 50 -	60 Hz			
400 V		P	kW	15
Rated uninterrupted current		I <sub>u</sub>	Α	32
Note on rated uninterrupted curr	ent !u			Rated uninterrupted current $I_{\rm u}$ is specified for max. cross-section.
Number of contact units			contact unit(s)	4

# **Technical data**

G	er	ıeı	ra

IEC/EN 60947, VDE 0660, IEC/EN 60204 Standards Switch-disconnector according to IEC/EN 60947-3

Climatic proofing			Damp heat, constant, to IEC 60068-2-78
• • • • • • • • • • • • • • • • • • • •			Damp heat, cyclic, to IEC 60068-2-30
Ambient temperature			
Enclosed		°C	-25 - +40
Overvoltage category/pollution degree			III/3
Rated impulse withstand voltage	U <sub>imp</sub>	V AC	6000
Mechanical shock resistance		g	12
Mounting position			As required
Contacts Mechanical variables			
Number of poles			6 pole
Auxiliary contacts			o puie
Auxiliary contacts		N/0	1
		N/C	1
Electrical characteristics		14/0	
Rated operational voltage	U <sub>e</sub>	V AC	690
Rated uninterrupted current		A	32
	Iu	^	
Note on rated uninterrupted current !u			Rated uninterrupted current $\mathbf{I}_{\mathbf{u}}$ is specified for max. cross-section.
Load rating with intermittent operation, class 12			
AB 25 % DF		x l <sub>e</sub>	2
AB 40 % DF		x I <sub>e</sub>	1.6
AB 60 % DF		x I <sub>e</sub>	1.3
Short-circuit rating			
Fuse		A gG/gL	35
Rated short-time withstand current (1 s current)	I <sub>cw</sub>	A <sub>rms</sub>	650
Note on rated short-time withstand current lcw			Current for a time of 1 second
Rated conditional short-circuit current	$I_{q}$	kA	1
Switching capacity			
cos φ rated making capacity as per IEC 60947-3		Α	320
Rated breaking capacity cos φ to IEC 60947-3		Α	
230 V		Α	260
400/415 V		Α	260
500 V		Α	240
690 V		Α	170
Safe isolation to EN 61140			
between the contacts		V AC	440
Current heat loss per contact at I <sub>e</sub>		W	1.1
Current heat loss per auxiliary circuit at I <sub>e</sub> (AC-15/230 V)		CO	1.1
Lifespan, mechanical	Operations	x 10 <sup>6</sup>	> 0.5
Maximum operating frequency	Operations/h		1200
AC			
AC-3			
Rating, motor load switch	P	kW	
220 V 230 V	P	kW	5.5
230 V Star-delta	P	kW	7.5
400 V 415 V	P	kW	11
400 V Star-delta	P	kW	15
500 V	P	kW	15
500 V Star-delta	P	kW	18.5
690 V	P	kW	11
690 V Star-delta	P	kW	22
Rated operational current motor load switch			
230 V	I <sub>e</sub>	Α	23.7
230 V star-delta	I <sub>e</sub>	Α	32
400V 415 V	I <sub>e</sub>	Α	23.7

400 V star-delta	l <sub>e</sub>	Α	32
500 V	I <sub>e</sub>	Α	23.7
500 V star-delta	I <sub>e</sub>	Α	32
690 V	I <sub>e</sub>	A	14.7
690 V star-delta	l <sub>e</sub>	A	25.5
	'e	^	23.3
AC-23A			
Motor rating AC-23A, 50 - 60 Hz	Р	kW	
230 V	Р	kW	7.5
400 V 415 V	P	kW	15
500 V	P	kW	15
690 V	P	kW	15
Rated operational current motor load switch			
230 V	l <sub>e</sub>	Α	32
400 V 415 V	I <sub>e</sub>	Α	32
		A	26.4
500 V	l <sub>e</sub>		
690 V	l <sub>e</sub>	Α	17
DC			
DC-1, Load-break switches L/R = 1 ms			
Rated operational current	I <sub>e</sub>	Α	25
Voltage per contact pair in series		V	60
DC-21A	I <sub>e</sub>	Α	
Rated operational current	I <sub>e</sub>	A	1
	'e		
Contacts		Quantity	1
DC-23A, motor load switch L/R = 15 ms			
24 V			
Rated operational current	I <sub>e</sub>	Α	25
Contacts		Quantity	1
48 V			
Rated operational current	I <sub>e</sub>	Α	25
Contacts		Quantity	2
60 V		,	
Rated operational current	ı	A	25
·	l <sub>e</sub>		
Contacts		Quantity	3
120 V			
Rated operational current	l <sub>e</sub>	Α	12
Contacts		Quantity	3
240 V			
Rated operational current	I <sub>e</sub>	Α	5
Contacts		Quantity	5
DC-13, Control switches L/R = 50 ms			
Rated operational current	Ie	A	20
	·e		
Voltage per contact pair in series	F 1:	V	24
Control circuit reliability at 24 V DC, 10 mA	Fault probability	H <sub>F</sub>	< 10 <sup>-5</sup> ,< 1 failure in 100,000 switching operations
Terminal capacities			
Solid or stranded		mm <sup>2</sup>	1 x (1 - 6)
			2 x (1 - 6)
Flexible with ferrules to DIN 46228		$\text{mm}^2$	1 x (0.75 - 4) 2 x (0.75 - 4)
Terminal corous			
Terminal screw			M4
Tightening torque for terminal screw		Nm	1.6
Technical safety parameters:			D10 values on per FN ICO 10040 4 to bla C4
Notes			B10 <sub>d</sub> values as per EN ISO 13849-1, table C1
Rating data for approved types			
Terminal capacity			
Terminal screw			M4

	Tightening torque	lb-in	17.7
--	-------------------	-------	------

#### Design verification as per IEC/EN 61439

Design verification as per IEC/EN 61439			
Technical data for design verification			
Rated operational current for specified heat dissipation	In	Α	32
Heat dissipation per pole, current-dependent	$P_{\text{vid}}$	W	1.1
Equipment heat dissipation, current-dependent	P <sub>vid</sub>	W	0
Static heat dissipation, non-current-dependent	P <sub>vs</sub>	W	0
Heat dissipation capacity	P <sub>diss</sub>	W	0
Operating ambient temperature min.		°C	-25
Operating ambient temperature max.		°C	40
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			UV resistance only in connection with protective shield.
10.2.5 Lifting			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances			Meets the product standard's requirements.
10.5 Protection against electric shock			Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components			Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections			Is the panel builder's responsibility.
10.8 Connections for external conductors			Is the panel builder's responsibility.
10.9 Insulation properties			
10.9.2 Power-frequency electric strength			Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage			Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material			Is the panel builder's responsibility.
10.10 Temperature rise			The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating			Is the panel builder's responsibility. The specifications for the switch gear must be observed. $\label{eq:constraint}$
10.12 Electromagnetic compatibility			Is the panel builder's responsibility. The specifications for the switch gear must be observed. $\label{eq:constraint}$
10.13 Mechanical function			The device meets the requirements, provided the information in the instruction leaflet (IL) is observed. $\label{eq:continuous}$

#### **Technical data ETIM 8.0**

Low-voltage industrial components (EG000017) / Switch disconnector (EC000216)

Electric engineering, automation, process control engineering / Low-voltage switch technology / Off-load switch, circuit breaker, control switch / Switch disconnector (ecl@ss10.0.1-27-37-14-03 [AKF060013])


	Yes
	Yes
	No
	Yes
	No
	1
V	690
V	690 - 690
Α	32
Α	32
Α	32
kW	11
	V A A


Rated short-time withstand current lcw	kA	0.65
Rated operation power at AC-23, 400 V	kW	15
Switching power at 400 V	kW	15
Conditioned rated short-circuit current Iq	kA	1
Number of poles		6
Number of auxiliary contacts as normally closed contact		1
Number of auxiliary contacts as normally open contact		1
Number of auxiliary contacts as change-over contact		0
Motor drive optional		No
Motor drive integrated		No
Voltage release optional		No
Device construction		Complete device in housing
Suitable for floor mounting		Yes
Suitable for front mounting 4-hole		No
Suitable for front mounting centre		No
Suitable for distribution board installation		No
Suitable for intermediate mounting		No
Colour control element		Red
Type of control element		Door coupling rotary drive
Interlockable		Yes
Type of electrical connection of main circuit		Screw connection
Degree of protection (IP), front side		IP65
Degree of protection (NEMA)		12


# Approvals

Product Standards	UL 60947-4-1;CSA - C22.2 No. 60947-4-1-14; CSA-C22.2 No. 94; IEC/EN 60947-3; CE marking
UL File No.	E36332
UL Category Control No.	NLRV
CSA File No.	12528
CSA Class No.	3211-05
North America Certification	UL listed, CSA certified
Specially designed for North America	Yes, additional labeling according to UL on the enclosure in combination with "+NA- 12" (105866)
Suitable for	Branch circuits, suitable as motor disconnect
Degree of Protection	IEC: IP65; UL/CSA Type 1, 12

# **Dimensions**

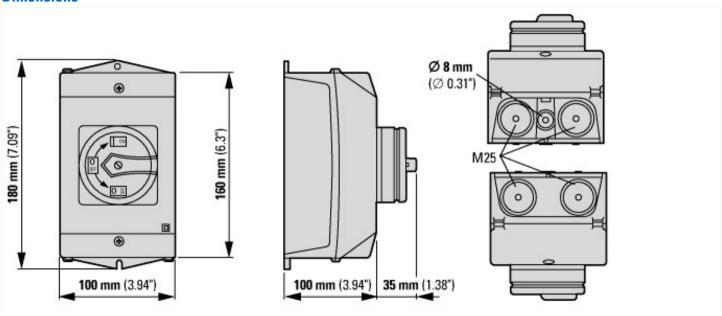

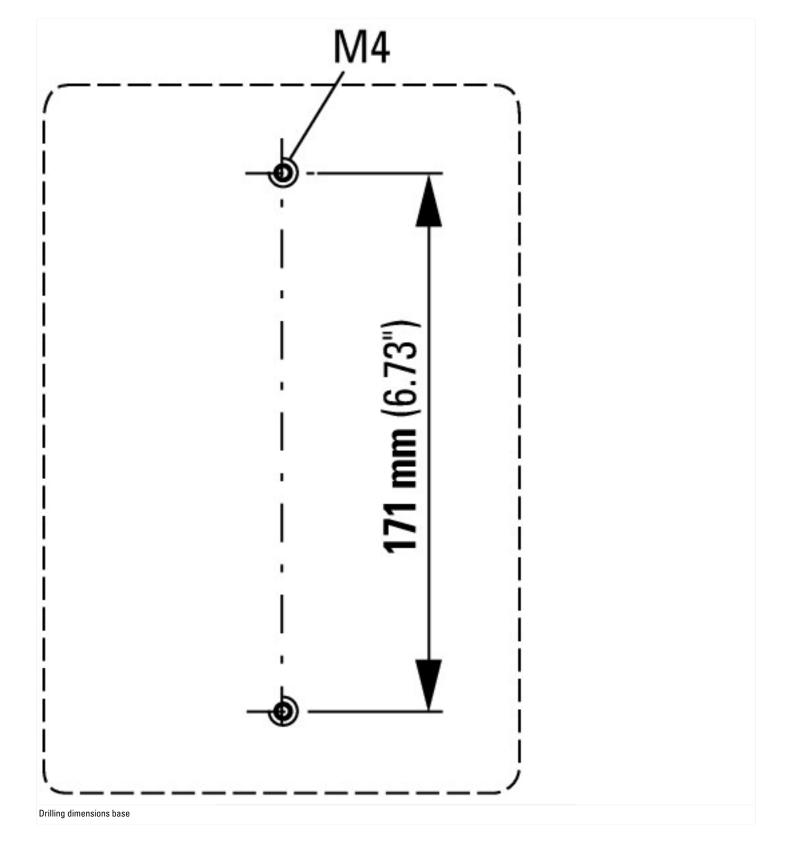

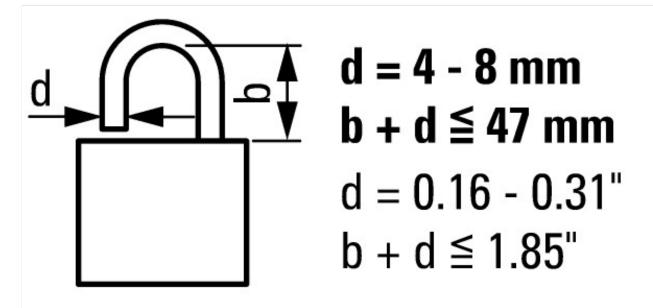

≦3 padlocks

#### **Additional product information (links)**

IL03801008Z (AWA1150-1688) Cam switch: Surface mounting enclosure		
IL03801008Z (AWA1150-1688) Cam switch: Surface mounting enclosure	https://es-assets.eaton.com/DOCUMENTATION/AWA_INSTRUCTIONS/IL03801008Z2021_06.pdf	
Display flip catalog page.	http://ecat.moeller.net/flip-cat/?edition=K115A&startpage=41	
Technical overview cam switch, switch-disconnector	http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&startpage=4.2	
System overview cam switch T	http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&startpage=4.4	
System overview switch-disconnector P	http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&startpage=4.6	
Key to part numbers Cam switch	http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&startpage=4.8	
Key to part numbers Switch-disconnector	http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&startpage=4.8	
Switches for ATEX	http://www.coopercrouse-hinds.eu/en/products/25-ex-safety-and-main-current-switches.html	
Ordering form for SOND switches and SOND front plates(DE_EN)	https://es-assets.eaton.com/DOCUMENTATION/PDF/MZ008006ZU_Orderform_Customized_Switch.pdf	
Ordering form for SOND switches and SOND front plates(DE_EN)]	https://es-assets.eaton.com/DOCUMENTATION/PDF/MZ008005ZU_Orderform_Customized_Switch.pdf	